



Name : .....  
Roll No. : .....  
Invigilator's Signature : .....

**CS/B.TECH(ECE)/SEM-5/EC-513/2011-12**

**2011**

**CONTROL SYSTEM**

*Time Allotted : 3 Hours*

*Full Marks : 70*

*The figures in the margin indicate full marks.*

*Candidates are required to give their answers in their own words as far as practicable.*


**GROUP – A**

**( Multiple Choice Type Questions )**

1. Choose the correct alternatives for any *ten* of the following :  
10 × 1 = 10
- i) If the maximum overshoot is 100%, the damping ratio is
- a) 1    b) 0
- c) 0.5     d) ∞ .
- ii) If the characteristic equation of a system is  $s^2 + 8s + 25 = 0$ , the value of  $\xi_n$  and  $\omega_n$  will be
- a) 0.8, 5 rad/s                                b) 0.8, 0.5 rad/s
- c) 0.5, 8 rad/s                                d) 5,  $\sqrt{8}$  rad/s.



- iii) Addition of a pole to the close loop transfer function
- a) increases rise time      b) decreases rise time
- c) increases overshoot      d) has no effect.
- iv) The transfer function of a system having a gain of 9 and a pole zero map as in figure below is

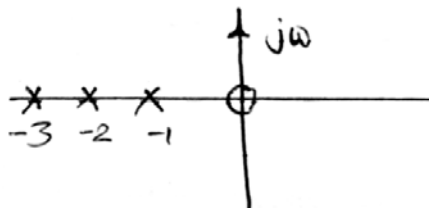

- a)  $\frac{9(s+1)(s+2)(s+3)}{s}$       b)  $\frac{9(s-1)(s-2)(s-3)}{s}$
- c)  $\frac{9s(s+1)}{(s+2)(s+3)}$       d)  $\frac{9s}{(s+1)(s+2)(s+3)}$
- v) The TF of a network  $\frac{1+0.5s}{2+s}$  is known as
- a) High pass system
- b) Lead network
- c) Lag network
- d) Proportional controller.
- vi) If the Nyquist plot of a certain feedback system crosses the negative real axis at  $-0.1$  point, the gain margin of the system is given by
- a) 0.1      b) 10
- c) 100      d) none of these.






- xi) The root locus is symmetrical w.r.t.
  - a) negative real axis
  - b) positive real axis
  - c) imaginary axis
  - d) positive & negative real axis.
- xii) A feedback control system is basically
  - a) high pass filter
  - b) band pass filter
  - c) low pass filter
  - d) none of these.

**GROUP – B**


**( Short Answer Type Questions )**

Answer any *three* of the following  $3 \times 5 = 15$

- 2. Consider the following mechanical translational system shown in figure below.  $F$  denotes force,  $x$  denotes displacement,  $M$  denotes mass and  $B$  denotes friction coefficient and  $K$  denotes spring constant.

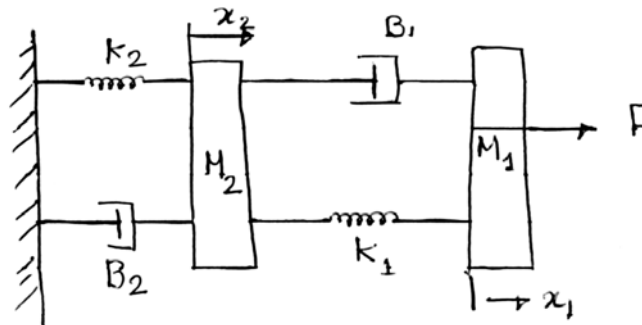

- i) Write down the differential equation(s) governing the above system.
- ii) Draw the corresponding electrical equivalent circuit using force-voltage analogy.



3. Using Routh criterion investigate the stability of the unity feedback control system whose open loop transfer function is

$$G(s) = \frac{e^{-sT}}{s(s+2)}$$

For what value of  $T$  will the system be stable ?

4. A system is represented by

$$\dot{X} = \begin{bmatrix} -3 & -2 \\ -1 & -2 \end{bmatrix} X + \begin{bmatrix} 1 \\ 1 \end{bmatrix} U(t)$$

$$Y = [1 \quad 2] X$$


Find the poles of the system. Assume  $D = 0$ .

5. Find the  $Z$ -transfer function of the system defined by

$$y(n) - 0.5y(n-1) = x(n-2) - 5x(n-2) + 6x(n) \text{ where } y(n) \text{ and } x(n) \text{ denote output and input sequences respectively.}$$

6. For the system defined by  $G(s) = \frac{5(s-1)}{(s+2)(s+5)}$  draw the approximate root-locus diagram.

7. Using Mason's Gain formula, determine the transfer function of the system.

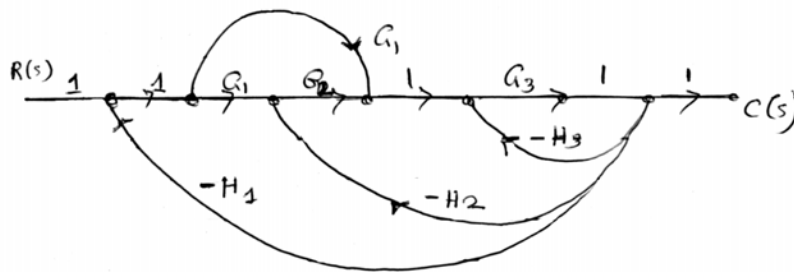

8. Obtain the  $Z$ -transform for a unit-step function.



**GROUP - C**

**( Long Answer Type Questions )**

Answer any *three* of the following.  $3 \times 15 = 45$

9. a) A unity feedback control system has an open loop transfer function

$$G(s) = \frac{k}{(s^2 + 8s + 32)}$$

Sketch the root locus of the system and deduce how the peak overshoot varies with increasing  $k$  if the loop is closed. 5 + 5

- b) What kind of controller would you recommend for this system ? 5


10. Prove that for a standard second order system defined by

$$G(s) = \frac{W_n^2}{s^2 + 2\xi W_n s + W_n^2}, \text{ the peak overshoot due to a step}$$

input depends on  $\xi$  only. Prove further that the constant  $\xi$  lines pass through the origin of the  $(\sigma i j \omega)$  plane. 10 + 5

11. a) Derive the transfer function for a zero-order hold. 5

- b) A continuous function  $y(t)$  is sampled by an impulse sampler as shown below :

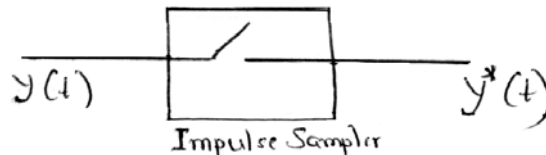

Obtain the Laplace transform for  $y^*(t)$  5

- c) Obtain the Z-transform for  $x[n] = |a|^n$  and comment on the ROC. 5



12. The open-loop transfer function of a unity feedback control system is given by

$$G(s) = \frac{s + 0.25}{s^2(s + 1)(s + 0.5)}$$

Determine the closed-loop stability by applying Nyquist criterion.

13. Sketch the Bode Plot for the transfer function defined by

$$G(s)H(s) = \frac{2(s + 0.2)}{s^2 + (s + 1)(s + 0.5)}$$

Determine

- a) phase cross-over frequency
- b) gain cross-over frequency
- c) gain margin
- d) phase margin. 7 + 8

14. a) Determine the transfer matrix for a system whose  $A, B, C$  matrices are :

$$A = \begin{bmatrix} 1 & -2 \\ 4 & -5 \end{bmatrix}, \quad B = \begin{bmatrix} 2 \\ 1 \end{bmatrix}, \quad C = [1 \quad 1] \quad 6$$

- b) Is the system stable ? 4
- c) Is the system controllable ? Assume  $D = 0$ . 5

=====